


MaXflo HDPE TEE STANDARD DESIGN



JOINT TYPES:

- EXTERNAL SPLIT COUPLERS - SOIL TIGHT
- BELL X BELL SEAL TIGHT COUPLER - SOIL TIGHT
- BELL X BELL SEAL TIGHT COUPLER W/ STAINLESS STEEL STRAPS - WATERTIGHT
- POLYSEAL MAR MAC COUPLER - WATERTIGHT

*FITTINGS ARE FABRICATED FROM TIMEWELL MAXFLO CORRUGATED HDPE DUAL WALL PIPE CONFORMING TO AASHTO M252 & M294.

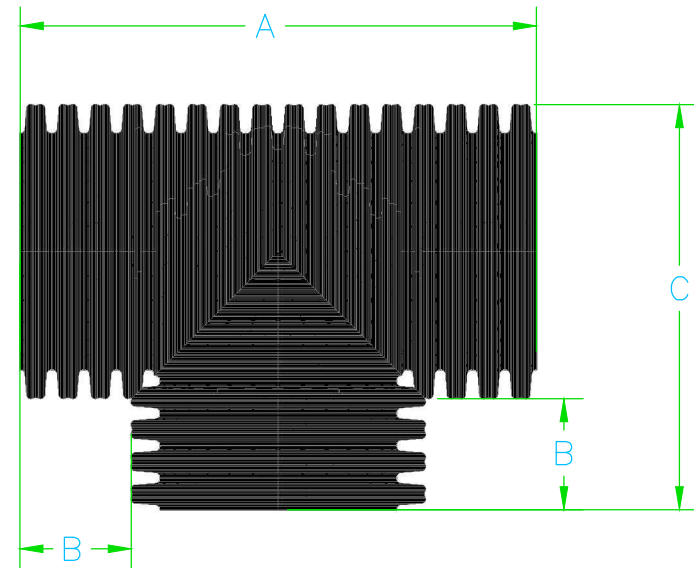

SIZE	A	B	C	PART #
4"	12.5"	4.0"	8.5"	31004-T
6"	15.0"	5.0"	12.0"	31006-T
8"	21.0"	6.5"	15.5"	31008-T
10"	27.0"	7.0"	18.5"	31010-T
12"	28.5"	8.0"	22.5"	31012-T
15"	34"	8.5"	26.0"	31015-T
18"	39.0"	9.0"	30.0"	31018-T
24"	47.0"	10.5"	38.0"	31024-T
30"	57.5"	12.0"	48.0"	31030-T
36"	60.0"	12.5"	54.0"	31036-T
42"	74.0"	13.5"	60.5"	31042-T
48"	77.0"	14.0"	68.0"	31048-T

*FITTING DIMENSIONS ARE FOR REFERENCE ONLY.

REV	DESCRIPTION	BY	DATE	CHK'D
1	DETAILS AND NOTES	BMH	12/2019	

MaXflo HDPE TEE STANDARD DESIGN

DRAWING NUMBER:



DRAWN BY:	BMH
DATE:	11/30/2011
CHECKED BY:	-
SCALE:	NTS
SHEET:	1 Of 1